


# INSTALLATION - SERVICE INSTRUCTIONS

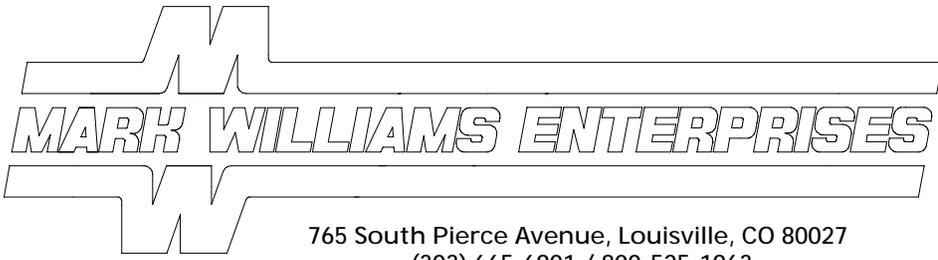

SERVICE BULLETIN

NO. 0039 PAGE 1 OF 1

INTEGRAL LUG NUT

JULY 2, 1997

**PART NUMBER :**  
51527  
41527

**DESCRIPTION :**  
STAINLESS STEEL INTEGRAL WASHER NUT, 5/8"-18 THREADS  
TITANIUM INTEGRAL WASHER NUT, 5/8"-18 THREADS

**PARTS INCLUDED :**

1-NUT

**PRIMARY APPLICATION :**

ANY APPLICATION WITH 5/8-18 THREADED DRIVE STUDS.

**OPERATION PRECAUTIONS :**

- 1) USE ONLY 6 POINT SOCKETS, 12 POINT SOCKETS WITH TIME WILL DEFORM HEX OF NUT.
- 2) DO NOT USE IMPACT WRENCH.
- 3) OCCASIONAL LUBE WITH MOLY BASED GREASE BETWEEN FLANGE AND WASHER.
- 4) NORMAL TORQUE 90-110 FT. LBS., BE AWARE THAT A HIGH FASTENING TORQUE CAN DEFORM THE WHEEL BEFORE YOU REACH THE DESIRED FT. LBS.

