

CIRCUIT RACING SLICKS - BIAS


ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND SOFT TO FIRM
43101	18.0 x 6.0-10 C2000	F500	6.2"	18.1"	57.0"	6"	6"	8.1"	R25B, R35B
43105	18.0 x 7.5-10	F500	7.5"	18.3"	57.5"	7-8"	8"	9.5"	R25B, R35B
43110	19.5 x 6.5-10	F500	6.5"	19.4"	61.0"	6"	6"	8.2"	R25B
43120	19.5 x 7.5-10	F500	7.5"	19.5"	61.2"	7-8"	8"	9.5"	R25B
43130	20.0 x 6.0-13	CF	6.0"	20.7"	65.0"	5.5-6.5"	5.5"	7.0"	R60A
43164	20.5 x 7.0-13	FB, FC, FM, SR	6.75"	21.0"	66.2"	6-8"	6"	8.0"	R25B, R35B, R60A
43167	20.0 x 7.5-13	SR	8.0"	20.6"	65.0"	6-9"	8"	9.4"	R25B, R35B
43173	20.0 x 8.0-13 CL	FP, HP, GT3, GTL	8.2"	19.8"	62.0"	5-6"	6"	9.2"	R35B, R45B
43186	20.0 x 9.0-13 A2500	FA, SR	9.75"	20.6"	64.7"	8-10"	10"	11.0"	R25B, R35B
43193	20.0 x 9.5-13 CL	EP, FP, GT3, GTL	9.4"	20.0"	63.0"	7"	7"	10.5"	MS
43272	22.0 x 8.0-13	SCCA-FE, SR	8.0"	22.0"	69.0"	7-9"	8"	9.6"	FE
43285	22.0 x 8.0-13	FB, FC, FM, SR	8.0"	22.0"	69.0"	7-9"	8"	9.6"	R35B, R60A
43290	22.0 x 9.0-13	FA, FB, FC, FM, SR	8.8"	22.1"	69.5"	8-10"	8"	10.0"	R25B, R35B, R60A
43307	22.5 x 7.2-13	CF	7.25"	22.6"	71.0"	5.5"	5.5"	9.8"	R60A
43309	22.5 x 7.2-13 A2500	FF	7.25"	22.6"	71.0"	5.5"	5.5"	9.8"	R25B
43312	22.0 x 10.0-13	SCCA-FE, SR	9.8"	22.6"	71.0"	8-10"	10"	11.6"	FE
43313	22.5 x 10.0-13	SR	9.8"	22.6"	71.0"	8-10"	10"	11.6"	R25B, R35B
43316	23.0 x 12.0-13	FA, SR	12.0"	23.6"	74.1"	12-15"	15"	15.9"	R25B, R35B
43337	21.0 x 5.0-15 C4000	FV	5.0"	21.2"	66.5"	4"	4"	5.5"	FVS
43353	22.5 x 5.5-15 C4000	FV	5.5"	21.9"	69.0"	4"	4"	6.5"	FVS
43382	23.0 x 9.5-15 CL	EP, FP, GT3, GTL	9.2"	22.8"	71.5"	6-7"	7"	9.4"	R35B, R45B

ALL TREAD PATTERNS SLICK

SOFT	FE	FIRM
R25B	R35B	R45B
	R60A	FVS

CIRCUIT RACING SLICKS - RADIAL

ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND SOFT TO FIRM
43322	185/60R13	FF	6.4"	21.8"	68.7"	5.5"	5.5"	7.7"	R60A
43327	205/60R13	FF	8.0"	22.7"	71.4"	5.5"	5.5"	8.7"	R60A
43331	210/550R13	P1, P2, Pro Mazda	8.7"	21.8"	68.5"	8-10"	10"	10.5"	S
43333	275/570R13	P1, P2, Pro Mazda	10.75"	22.5"	70.7"	10-12"	12"	12.6"	S
43370	20.5x7.0R13	FC	7.3"	20.8"	65.3"	6-7"	6"	7.7"	R55A
43380	22.5x8.0R13	FC	8.4"	22.4"	70.3"	8-9"	8"	9.6"	R55A
43551	215/530R13 GT PRO	PROD., GT	8.3"	20.8"	65.4"	6-7"	7"	8.8"	S, MS, M
43553	200/580R15	RADICAL Front	8.0"	22.9"	71.9"	6.5-8"	8"	8.8"	R55A
43554	200/540R13	F4	7.4"	21.3"	67.0"	8-9"	9"	9.4"	R55A
43359	250/575R13	F4	10.0"	22.7"	71.3"	10-11"	10"	10.9"	R55A
43559	215/580R15 GT PRO	PROD., GT	8.6"	22.9"	71.8"	7-9"	7"	9.7"	S, MS, M
43569	245/580R15 GT PRO	PROD., GT	9.4"	22.9"	71.8"	7-10"	7"	10.0"	S, MS, M
43572	23.0 x 9.5R15	FA/P1/Indy Lights	9.4"	22.9"	72.0"	10"	10"	10.7"	R35B
43587	24.5 x 13.75R15	FA/P1/Indy Lights	13.75"	24.5"	77.0"	14"	14"	14.5"	R35B
43589	330/700R15	HSC / TA2	11.9"	27.7"	87.1"	10-10.5"	10"	13.0"	MS
43591	27.5 x 11.5R15	HSC / TA2	11.5"	27.4"	86.0"	10"	9.5"	12.8"	R75A
43654	23.5 x 11.0R16 GT Pro	GT2	10.6"	23.6"	74.0"	10"	10"	11.0"	S, MS

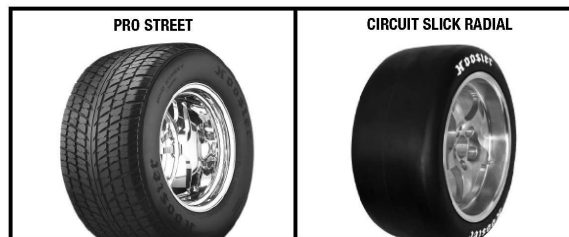

CIRCUIT RACING SLICKS - RADIAL CONTINUED

ITEM NUMBER	TIRE SIZE	APPLICATION	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND SOFT TO FIRM
43659	23.5 x 12.0R16 GT Pro	GT2	12.0"	23.5"	73.8"	10-12"	12"	13.0"	S, MS
43663	265/605R16	RADICAL Rear	9.7"	23.9"	75.1"	9-10"	10"	10.9"	R55A
43673	25.5 x 12.5R16 GT Pro	GT1	12.4"	25.8"	81.0"	10-12"	12"	13.5"	S, MS
43674	25.5 x 14.0R16 GT Pro	GT1	13.6"	25.7"	80.9"	12"	12"	14.1"	S, M
43697	28.0 x 14.5R16 GT Pro	GT1	13.9"	28.2"	88.5"	13"	13"	15.1"	S, M
43710	200/610R17	GT Cars / Club	7.7"	23.9"	75.0"	7-8"	7.5"	8.2"	S100, S120
43723	230/610R17	GT Cars / Club	9.0"	23.9"	75.1"	9"	9"	9.75"	S100
43726	235/620R17	NASA Prototype	8.8"	24.3"	76.5"	9"	9"	9.6"	NP01
43730	240/610R17	Hill Climb	9.0"	23.9"	75.1"	9"	9"	9.75"	R25B, R35B, R45B
43740	265/630R17	GT Cars / Club	10.1"	24.8"	77.9"	9-10"	10"	10.7"	S100
43822	240/640R18 GT PRO	GT Cars / Club	9.1"	25.6"	80.4"	8-9.5"	9"	9.8"	M, MH
43831	255/645R18 GT PRO	GT Cars / Club	9.8"	25.5"	80.0"	10"	10"	10.9"	M
43837	265/650R18	TCR/GT Cars/Club	10.1"	25.5"	80.0"	9-10"	10"	10.9"	M, S100
43849	280/680R18 GT PRO	GT Cars / Club	10.8"	26.9"	84.6"	9-11"	10"	11.3"	M, MH
43850	285/650R18	GT Cars / Club	11.0"	25.5"	80.5"	10-12"	11"	11.9"	S75, S80, S100
43872	310/650R18	GT Cars/Club/Viper Front	11.6"	25.8"	81.1"	11-13"	12"	12.8"	M
43873	310/680R18	GT Cars / Club Rear	11.6"	26.8"	84.3"	11-13"	12"	13.1"	M
43874	310/680R18		11.6"	26.8"	84.3"	11-13"	12"	13.1"	S75
43892	325/710R18	GT Cars / Club Rear	12.0"	27.7"	87.0"	11-13"	13"	13.7"	S75
43897	355/650R18	Viper Rear	13.2"	25.8"	81.0"	12-14"	13"	14.3"	S100

ALL TREAD PATTERNS ARE SLICKS

SOFT						MS, S75	R55A	M, S80	MH, S100	S120	FIRM
R25B			S, R35B								

CIRCUIT RACING WETS - BIAS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	APPLICATION
44115	18.0 x 6.0-10 W3	FSAE Wet	6.2"	17.8"	56.0"	6-8"	6"	7.8"	F500, FSAE
44125	19.5 x 6.5-10 W3	Circuit Wet	6.2"	19.7"	62.0"	6-8"	8"	8.2"	F500
44150	20.0 x 7.5-13 W3	Circuit Wet	7.4"	20.6"	64.6"	7-8"	7"	8.3"	CSR, FA
44185	21.0 x 6.5-13 W3	Circuit Wet	6.7"	21.2"	66.5"	6-8"	6"	7.2"	FF, FM, FC, S2000, DSR
44196	22.0 x 8.0-13 W3	Circuit Wet	7.8"	22.0"	69.0"	8.0"	8"	8.9"	SCCA-FE
44217	22.0 x 9.0-13 W3	Circuit Wet	9.6"	22.6"	71.0"	8.5-10"	9"	10.6"	SCCA-FE, FC, FA, FM, P1, P2
44266	22.5 x 5.0-15 W3	Circuit Wet	5.0"	22.0"	69.2"	4.0"	4"	6.5"	FV
44298	25.5 x 8.5-15	Vintage Wet	8.1"	25.3"	79.8"	7-8"	8"	10.3"	Historic
44307	27.0 x 10.0-15	Vintage Wet	10.0"	27.0"	84.0"	10-11"	10"	12.5"	HSC/GTA

CIRCUIT RACING WETS - RADIALS

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	APPLICATION
43330	200/540R13 W3	Circuit Radial Wet	7.4"	21.3"	67.0"	8-9.0"	9.0"	9.4"	F4
43333	250/575R13 W3	Circuit Radial Wet	10.0"	22.7"	71.3"	10-11"	10.0"	10.9"	F4
44421	185/60R13 W3	DOT Radial Wet	6.5"	21.7"	68.0"	5.5"	5.5"	7.5"	FF
44426	205/60R13 W3	DOT Radial Wet	7.4"	23.2"	72.5"	5.5"	5.5"	8.4"	FF
44442	20.5 x 7.0R13 W3	Circuit Radial Wet	7.2"	20.8"	65.3"	6"	6"	7.8"	F2000
44443	22.5 x 8.0R13 W3	Circuit Radial Wet	8.3"	22.4"	70.5"	8"	8"	9.8"	F2000
44511	23.0 x 9.0R-15 W3	Circuit Radial Wet	9.4"	23.0"	72.3"	10"	10"	10.7"	FA
44516	24.5 x 13.0R-15 W3	Circuit Radial Wet	13.0"	24.4"	76.6"	14"	14"	15.1"	FA
44593	330/700R15 WET	SC Radial Wet	12.5"	27.6"	86.9"	10-10.5"	10"	13.0"	NASCAR EURO/TA2/HSC
44670	25.5 x 12.0R-16 W2	Circuit Radial Wet	12.2"	25.7"	80.9"	12"	12"	13.2"	GT1, GT2
44690	28.0 x 12.5R-16 W2	Circuit Radial Wet	13.6"	27.3"	85.7"	12"	12"	14.2"	GT1

VINTAGE

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	MODEL
43195	20.0 x 10.0-13	Slick	10.0"	19.8"	62.4"	9-11"	10.0"	11.6"	F5000, R35B
43385	23.5 x 10.5-15	Slick	10.8"	23.4"	73.6"	10-12"	11.5"	13.0"	F5000, Can AM, R35B
43386	26.0 x 16.2-15	Slick	15.4"	26.0"	81.4"	16-18"	17.0"	18.3"	F5000, Can AM, R35B
43391	26.0 x 15.0-15	Slick	15.0"	26.0"	81.6"	15-17"	15.0"	17.1"	F5000, Can AM, R35B
44391	19.0 x 5.0-10	T.D.R.	5.2"	18.8"	59.0"	5-6"	5.5"	7.8"	HOOSIER T.D. R
44355	20.5 x 6.0-13	T.D.R.	6.2"	20.6"	64.7"	5-7"	5.0"	7.0"	HOOSIER T.D. R
44356	20.5 x 8.0-13	T.D.R.	7.8"	20.8"	65.5"	6.5-8.5"	7.5"	9.0"	HOOSIER T.D. R
44365	22.5 x 6.0-13	T.D.R.	6.2"	22.4"	70.3"	5-7"	5.0"	7.5"	HOOSIER T.D. R
44415	23.0 x 6.5-14	T.D.R.	7.2"	23.0"	72.3"	5.5-8"	5.5"	8.3"	HOOSIER T.D. R
44416	23.0 x 7.5-14	T.D.R.	7.8"	23.0"	72.5"	6-9"	6.0"	8.8"	HOOSIER T.D. R
44561	23.0 x 6.5-15	T.D.R.	6.7"	23.0"	72.5"	5.5-7"	6.0"	7.6"	HOOSIER T.D. R
44562	23.0 x 7.5-15	T.D.R.	7.6"	23.0"	72.5"	6.5-8.5"	7.5"	8.5"	HOOSIER T.D. R
44563	24.0 x 7.0-15	T.D.R.	7.0"	24.0"	75.5"	6-8.5"	6.0"	8.5"	HOOSIER T.D. R
44564	24.0 x 8.5-15	T.D.R.	8.5"	24.0"	75.5"	7.0-9.5"	8.0"	10.0"	HOOSIER T.D. R
44566	25.5 x 8.0-15	T.D.R.	8.0"	25.2"	79.2"	6-9"	6.0"	9.2"	HOOSIER T.D. R
44287	25.5 x 8.5-15	T.D.R.	8.5"	25.2"	79.2"	7-10"	8.0"	10.3"	HOOSIER T.D. R
44297	25.5 x 10.0-15	T.D.R.	10.0"	25.8"	81.0"	8-11"	8.0"	11.2"	HOOSIER T.D. R
44308	26.5 x 9.5-15	T.D.R.	9.5"	26.6"	83.5"	8-10"	8.0"	11.0"	HOOSIER T.D. R
44309	26.5 x 11.0-15	T.D.R.	10.4"	27.0"	84.9"	9-12"	12.0"	13.6"	HOOSIER T.D. R
44317	27.5 x 11.0-15	T.D.R.	11.0"	27.7"	87.0"	10-13"	10.0"	13.2"	HOOSIER T.D. R
44337	24.0 x 8.5-16	T.D.R.	8.2"	24.1"	75.4"	7-10"	8.0"	10.5"	HOOSIER T.D. R
44347	25.5 x 10.0-16	T.D.R.	10.0"	25.6"	80.5"	9-11"	9.0"	11.3"	HOOSIER T.D. R
44165	135/545-13	Vintage	5.4"	21.3"	67.0"	5.5"	5.0"	6.6"	VFF
44170	165/580-13	Vintage	6.8"	22.7"	71.2"	5.5"	6.0"	8.5"	VFF
44380	22.0 x 7.0-13	Vintage	6.8"	20.9"	68.8"	5.5-7.5"	5.5"	7.8"	WET
44205	21.0 x 9.0-13	Vintage	9.125"	20.9"	65.6"	10.0"	10.0"	10.5"	Vintage, FB R35B
44225	23.0 x 12.0-13	Vintage	13.0"	23.3"	73.25"	13.0"	13.0"	14.375"	Vintage, FB R35B
44405	120/590-15	Vintage	4.8"	22.6"	70.9"	4.5"	4.5"	6.1"	VINTAGE T.D.
44408	135/620-15	Vintage	5.6"	24.1"	75.6"	4.5"	4.5"	6.9"	VINTAGE T.D.
44400	5.00-15	Vintage	5.2"	24.7"	77.6"	4-6"	4.0"	7.0"	VINTAGE T.D.
44410	5.50-15	Vintage	6.5"	24.7"	77.6"	4.5-7"	4.5"	7.7"	VINTAGE T.D.
46003	P205/60R13	Speedster	7.3"	22.7"	71.2"	5.5-7"	6.0"	8.4"	SPEEDSTER
46007	P205/55R14	Speedster	7.3"	22.8"	71.6"	6.5"	6.5"	8.5"	SPEEDSTER
46011	P185/65R15	Speedster	6.4"	24.2"	76.0"	5-7"	5.0"	7.0"	SPEEDSTER
46014	P205/50R15	Speedster	7.3"	22.7"	71.4"	5.5-8"	7.0"	8.3"	SPEEDSTER
46016	P205/60R15	Speedster	7.3"	24.2"	76.0"	5.5-8"	6.5"	8.2"	SPEEDSTER
46021	P225/50R15	Speedster	8.1"	24.2"	76.0"	6.5-9"	7.0"	9.125"	SPEEDSTER

WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for making and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle



CIRCUIT RACING D.O.T. - RADIAL

ITEM NUMBER	TIRE SIZE	LOAD/SPEED RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	A7	R7
46302	P185/60ZR13	80W	A7 / R7	6.9"	21.7"	68.2"	5.0-7.0"	6.0"	7.8"		X
46304	P205/60ZR13	86W	A7 / R7	8.0"	22.8"	71.7"	5.5-7.5"	6.0"	8.8"		X
46309	P225/45ZR13	77W	A7 / R7	8.5"	20.9"	65.8"	7.0-8.5"	7.5"	9.3"	X	X
46322	P255/40ZR13	82W	A7 / R7	9.5"	20.9"	65.6"	8.5-10.0"	9.0"	10.5"	X	
46406	P205/55ZR14	85W	A7 / R7	8.1"	22.8"	71.6"	5.5-7.5"	7.0"	9.1"		X
46502	P205/50ZR15	84W	A7 / R7	8.0"	22.8"	71.8"	5.5-7.5"	6.5"	8.5"	X	X
46503	P205/50ZR15 SM7.5		A7 / R7	8.0"	22.8"	71.8"	5.0-7.5"	6.5"	8.5"		X
46511	P225/45ZR15	81W	A7 / R7	8.6"	22.8"	71.8"	7.0-8.5"	7.5"	9.3"	X	X
46516	P225/50ZR15	90W	A7 / R7	8.8"	23.8"	74.8"	6.0-8.0"	7.0"	9.7"		X
46522	P245/40ZR15	83W	A7 / R7	9.0"	23.0"	72.0"	8.0-9.5"	8.5"	10.0"	X	X
46526	P245/50ZR15	95W	A7 / R7	9.4"	24.4"	76.2"	7.0-8.5"	7.5"	10.3"		X
46536	P275/35ZR15	82W	A7 / R7	10.1"	23.0"	72.2"	9.0-11.0"	9.5"	10.8"	X	X
46540	P275/50ZR15	101W	A7 / R7	10.0"	25.5"	80.0"	7.5-9.5"	8.0"	10.8"		X
46560	P295/35ZR15	101W	A7 / R7	10.5"	23.0"	72.3"	9.0-11.0"	10.0"	11.6"	X	X
46601	P205/45ZR16	77W	A7 / R7	8.0"	23.0"	72.1"	7.0-8.5"	7.0"	8.5"	X	X
46611	P225/50ZR16	91W	A7 / R7	8.8"	24.7"	77.6"	6.0-8.0"	7.0"	9.4"		X
46616	P245/45ZR16	88W	A7 / R7	9.5"	24.4"	76.5"	7.5-9.0"	8.0"	10.3"	X	X
46620	P255/50ZR16	99W	A7 / R7	9.4"	26.2"	82.2"	7.0-9.0"	8.0"	10.5"		X
46630	P275/45ZR16	94W	A7 / R7	10.3"	25.6"	80.5"	8.5-10.0"	9.0"	11.2"	X	X
46706	P225/40ZR17	81W	A7 / R7	9.0"	23.8"	74.8"	7.5-9.0"	8.0"	9.6"	X	X
46711	P225/45ZR17	84W	A7 / R7	9.0"	24.7"	77.8"	7.0-8.5"	7.5"	9.7"	X	X
46716	P245/40ZR17	86W	A7 / R7	9.7"	24.3"	76.0"	8.0-9.5"	8.5"	10.3"	X	X
46721	P245/45ZR17	89W	A7 / R7	9.3"	25.5"	80.0"	7.5-9.0"	8.0"	10.0"		X
46729	P275/35ZR17	85W	A7 / R7	10.3"	24.7"	77.7"	9.0-11.0"	9.5"	11.0"	X	X
46730	P275/40ZR17	93W	A7 / R7	10.3"	25.5"	80.1"	9.0-11.0"	9.5"	11.0"	X	X
46733	P295/35ZR17	89W	A7 / R7	10.8"	25.3"	79.5"	9.5-11.0"	10.0"	11.6"	X	X
46735	P315/35ZR17	93W	A7 / R7	11.8"	25.6"	80.4"	11.0-12.0"	11.0"	12.6"	X	X
46740	P335/35ZR17	97W	A7 / R7	12.9"	25.6"	80.5"	11.0-13.0"	12.0"	13.6"	X	
46811	P225/40ZR18	83W	A7 / R7	8.8"	24.7"	77.6"	7.5-9.0"	8.0"	9.6"		X
46821	P245/35ZR18	80W	A7 / R7	9.4"	24.4"	76.7"	8.0-9.5"	8.5"	9.9"	X	X
46826	P245/40ZR18	88W	A7 / R7	9.0"	25.4"	79.8"	8.0-9.5"	8.5"	10.3"	X	X
46832	P255/35ZR18	82W	A7 / R7	10.3"	24.8"	77.8"	8.5-10.0"	9.0"	10.8"	X	X
46836	P275/35ZR18	87W	A7 / R7	10.3"	25.5"	80.2"	9.0-11.0"	9.5"	10.7"	X	X
46840	P285/30ZR18	86W	A7 / R7	10.9"	24.9"	78.1"	10.0-11.0"	10.0"	11.5"	X	X
46843	P295/30ZR18	88W	A7 / R7	10.8"	25.3"	79.5"	9.5-11.0"	10.0"	11.6"	X	X
46844	P295/40ZR18	98W	A7 / R7	10.4"	27.2"	85.6"	10.0-11.5"	10.5"	11.9"		X
46846	P315/30ZR18	91W	A7 / R7	11.8"	25.6"	80.5"	11.0-12.0"	11.0"	12.5"	X	X
46847	P315/40ZR18	102W	A7 / R7	11.3"	27.3"	85.7"	10.5-12.5"	11.0"	13.2"		X
46850	P335/30ZR18	95W	A7 / R7	12.8"	25.6"	80.5"	12.0-13.0"	12.0"	13.5"	X	X
46855	P345/35ZR18	100W	A7 / R7	13.2"	26.8"	84.2"	11.0-13.0"	12.0"	13.9"	X	X
46916	P235/35ZR19	79W	A7 / R7	9.25"	25.6"	80.5"	8.0-9.5"	9.0"	10.2"	X	X
46925	P265/35ZR19	86W	A7 / R7	9.6"	26.2"	82.3"	9.0-10.0"	9.0"	10.4"	X	X
46935	P295/30ZR19	89W	A7 / R7	10.4"	26.1"	82.1"	10.0-12.0"	10.0"	11.5"	X	X
46936	P295/35ZR19	92W	A7 / R7	10.0"	27.3"	86.0"	10.0-12.0"	10.0"	11.5"		X
46937	P315/30ZR19	93W	A7 / R7	12.0"	26.1"	82.2"	11.0-12.0"	11.0"	12.5"	X	X
46938	P315/35ZR19	96W	A7 / R7	11.3"	27.3"	85.7"	11.0-12.0"	12.0"	13.2"		X
46940	P315/40ZR19	103W	A7 / R7	11.3"	28.9"	90.7"	11.0-12.0"	11.0"	12.9"		X
46945	P325/30ZR19	94W	A7 / R7	12.2"	26.8"	84.1"	12.0-13.0"	13.0"	13.6"	X	X
46950	P345/30ZR19	98W	A7 / R7	13.0"	26.8"	84.3"	12.0-13.0"	13.0"	14.1"	X	X
46955	P245/35ZR20	95W	A7 / R7	9.1"	26.8"	84.3"	9.0-10.0"	8.5"	9.8"		X
46965	P265/30ZR20	95W	A7 / R7	9.8"	26.7"	83.9"	9.0-10.0"	9.5"	10.9"		X
46975	P285/30ZR20	99W	A7 / R7	9.9"	26.7"	84.0"	9.0-10.0"	10.0"	11.5"		X
46980	P295/30ZR20	101W	A7 / R7	10.6"	27.2"	85.5"	10.0-11.0"	10.5"	11.7"		X
46986	P305/30ZR20	103W	A7 / R7	11.8"	27.1"	85.3"	11.0-12.0"	12.0"	13.2"	X	X
46996	P335/25ZR20	103W	A7 / R7	12.8"	27.1"	85.5"	12.0-13.0"	12.0"	13.5"	X	X

WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for making and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

CIRCUIT RACING D.O.T. - RADIAL WET

ITEM NUMBER	TIRE SIZE	LOAD/SPEED RATING	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH
46100	P185/60R13 H20	86H	D.O.T. Radial Wet	6.8"	21.7"	68.1"	5.0-7.0"	6.0"	7.7"
46105	P205/60R13 H20	86H	D.O.T. Radial Wet	7.1"	23.5"	73.8"	6.0-7.5"	6.0"	8.5"
46115	P205/55R14 W2	85H	D.O.T. Radial Wet	7.1"	23.5"	73.8"	6.5-7.5"	6.5"	8.7"
46125	P205/50R15 H20	84H	D.O.T. Radial Wet	7.1"	23.5"	73.8"	6.5-7.5"	6.5"	8.2"
46125	P205/50R15 SMW	84H	D.O.T. Radial Wet	7.1"	23.5"	73.8"	6.5-7.5"	6.5"	8.2"
46127	P225/45R15 W2	81H	D.O.T. Radial Wet	8.9"	22.9"	72.0"	7.0-8.5"	8.0"	9.4"
46135	P205/45R16 H20	77H	D.O.T. Radial Wet	7.1"	23.5"	73.8"	7.0-7.5"	7.0"	8.4"
46140	P225/50R16 H20	91H	D.O.T. Radial Wet	8.8"	24.8"	77.9"	7.0-9.0"	7.0"	9.6"
46145	P245/45R16 H20	88H	D.O.T. Radial Wet	9.0"	24.8"	77.9"	7.0-9.0"	8.0"	10.0"
46150	P255/50R16 H20	99H	D.O.T. Radial Wet	9.3"	26.3"	82.5"	8.0-10.0"	8.0"	10.7"
46170	P225/45R17 W2	84H	D.O.T. Radial Wet	8.8"	24.8"	77.9"	8.0-9.0"	7.5"	9.5"
46175	P245/40R17 H20	86H	D.O.T. Radial Wet	9.0"	24.8"	77.9"	7.0-9.0"	8.0"	10.0"
46185	P275/40R17 H20	93H	D.O.T. Radial Wet	10.0"	25.2"	79.2"	9.0-11.0"	9.5"	11.3"
46200	P225/40R18 H20	83H	D.O.T. Radial Wet	8.8"	24.8"	77.9"	7.0-9.0"	8.0"	9.9"
46205	P245/35R18 H20	80H	D.O.T. Radial Wet	9.0"	24.8"	77.9"	7.0-9.0"	8.0"	10.0"
46207	P245/40R18 H20	88H	D.O.T. Radial Wet	8.75"	25.5"	80.25"	8.0-9.5"	9.0"	9.75"
46215	P275/35R18 H20	87H	D.O.T. Radial Wet	10.0"	25.2"	79.2"	10.0-11.0"	9.5"	11.3"
46220	P305/30R18 H20	89H	D.O.T. Radial Wet	11.8"	25.6"	80.4"	11.0-12.0"	11.0"	12.7"
46230	P325/35R18 H20	130H	D.O.T. Radial Wet	12.0"	27.0"	84.6"	11.0-12.0"	12.0"	13.3"

WARNING: DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for making and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

NOTE: H Speed Rating = 130 mph/210 km/h.



FORMULA STUDENT (FSAE)

ITEM NUMBER	TIRE SIZE	APPLICATION	APPROX. WEIGHT	TREAD WIDTH.	APPROX. DIA.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND SOFT TO FIRM
41100	6.0/18.0-10	FSAE-Slick	8LBS	6.0"	18.1"	6-7"	7.0"	8.5"	LC0
43070	16.0 x 6.0-10	FSAE-Slick	7LBS	6.0"	16.3"	6-7"	6.0"	6.9"	LC0, R25B
43075	16.0 x 7.5-10	FSAE-Slick	8LBS	7.3"	16.2"	6-8"	8.0"	8.4"	LC0, R25B
43101	18.0 x 6.0-10 C2000	FSAE-Slick	9LBS	6.2"	18.1"	6.5-7"	6.0"	8.1"	R25B
43105	18.0 x 7.5-10	FSAE-Slick	10LBS	7.5"	18.3"	7-8"	8.0"	9.5"	R25B
43110	19.5 x 6.5-10	FSAE-Slick	10LBS	6.5"	19.4"	5.5-7"	6.0"	8.2"	R25B
43120	19.5 x 7.5-10	FSAE-Slick	11LBS	7.5"	19.5"	7-8"	8.0"	9.5"	R25B
43164	20.5 x 7.0-13	FSAE-Slick	11LBS	7.0"	21.0"	5.5-8"	6.0"	8.0"	R25B
43167	20.0 x 7.5-13	FSAE-Slick	12LBS	8.0"	20.6"	7-9"	8.0"	9.4"	R25B
44070	16.0 x 7.0-10	Circuit Wet	7.5LBS	7.0"	16.2"	6-7"	6.0"	7.6"	W3
44115	18.0 x 6.0-10	FSAE-Wet	9LBS	6.2"	17.8"	6-8"	6.0"	7.8"	W3
44125	19.5 x 6.5-10	Circuit Wet	10LBS	6.2"	19.5"	6-8"	6.0"	8.2"	Wet
44150	20.0 x 7.5-13	Circuit Wet	12LBS	7.4"	20.6"	6-8"	7.0"	8.3"	W3
44185	21.0 x 6.5-13	Circuit Wet	11LBS	6.7"	20.9"	6-8"	6.0"	7.2"	W3

RALLY

ITEM NUMBER	TIRE SIZE	TREAD PATTERN	TREAD WIDTH	APPROX. DIA.	APPROX. CIRC.	RECOM. RIM WIDTH	MEASURED RIM WIDTH	SECTION WIDTH	COMPOUND
44002	165/80R13	Gravel Rally - Right	5.3"	23.5"	74.0"	6.0"	6.0"	7.3"	MED, HARD, X HARD
44003	165/80R13	Gravel Rally - Left	5.3"	23.5"	74.0"	6.0"	6.0"	7.3"	MED, HARD, X HARD
44004	185/70R13	Gravel Rally - Right	5.8"	23.5"	74.0"	7.0"	7.0"	8.2"	MED, HARD, X HARD
44005	185/70R13	Gravel Rally - Left	5.8"	23.5"	74.0"	7.0"	7.0"	8.2"	MED, HARD, X HARD
44006	185/65R15	Gravel Rally - Right	6.5"	24.8"	78.0"	6.0"	6.0"	7.4"	MED, HARD, X HARD
44007	185/65R15	Gravel Rally - Left	6.5"	24.8"	78.0"	6.0"	6.0"	7.4"	MED, HARD, X HARD
44008	195/65R15	Gravel Rally - Right	6.7"	25.2"	79.0"	7.0"	6.0"	7.7"	MED, HARD, X HARD
44009	195/65R15	Gravel Rally - Left	6.7"	25.2"	79.0"	7.0"	6.0"	7.7"	MED, HARD, X HARD
44010	205/65R15	Gravel Rally - Right	7.1"	25.3"	79.5"	7.0"	7.0"	8.75"	MED, HARD, X HARD
44011	205/65R15	Gravel Rally - Left	7.1"	25.3"	79.5"	7.0"	7.0"	8.75"	MED, HARD, X HARD
44300	200/530R13	Symmetric Tarmac	6.9"	20.8"	65.5"	7.5"	7.0"	7.6"	WET, DS
44305	200/530R13	Symmetric Tarmac	6.9"	20.8"	65.5"	7.5"	7.0"	7.6"	DM, DH
44310	220/530R13	Symmetric Tarmac	7.8"	20.8"	65.5"	7.5"	7.5"	8.5"	WET, DS
44315	220/530R13	Symmetric Tarmac	7.8"	20.8"	65.5"	7.5"	7.5"	8.5"	DM, DH
44500	200/580R15	Symmetric Tarmac	7.5"	22.7"	71.5"	7.5"	7.0"	8.6"	WET, DS
44510	200/580R15	Symmetric Tarmac	7.5"	22.7"	71.5"	7.5"	7.0"	8.6"	DM, DH
44522*	195/50R15	Symmetric Tarmac	7.2"	22.8"	71.5"	6.0"	6.5"	7.8"	WET, DS
44523*	195/50R15	Symmetric Tarmac	7.2"	22.8"	71.5"	6.0"	6.5"	7.8"	DM, DH
44601*	195/50R16	Asymmetric Tarmac	7.6"	23.7"	74.0"	6.0"	6.5"	7.8"	WET, DS
44602*	195/50R16	Asymmetric Tarmac	7.6"	23.7"	74.0"	6.0"	6.5"	7.8"	DM, DH
44701*	195/50R17	Asymmetric Tarmac	7.6"	24.6"	77.1"	7.0"	7.0"	7.9"	WET, DS
44702*	195/50R17	Asymmetric Tarmac	7.6"	24.6"	77.1"	6.0"	7.0"	7.9"	DM, DH
44801*	225/40R18	Asymmetric Tarmac	8.6"	25.3"	79.4"	8.0"	8.0"	9.0"	WET, DS
44802*	225/40R18	Asymmetric Tarmac	8.6"	25.3"	79.4"	8.0"	8.0"	9.0"	DM, DH

* = E-MARK

